



NOTES

- 1 All concrete to comply with NZS 3109 : 1989.
- 2 Slump of concrete 50mm max.
- 3 Concrete to have a compressive strength of 20 Mpa at 28 days.
- 4 Colour of interlocking blocks to be as per specification.
- 5 Concrete blocks shall be manufactured in accordance with NZS 3116:1991.

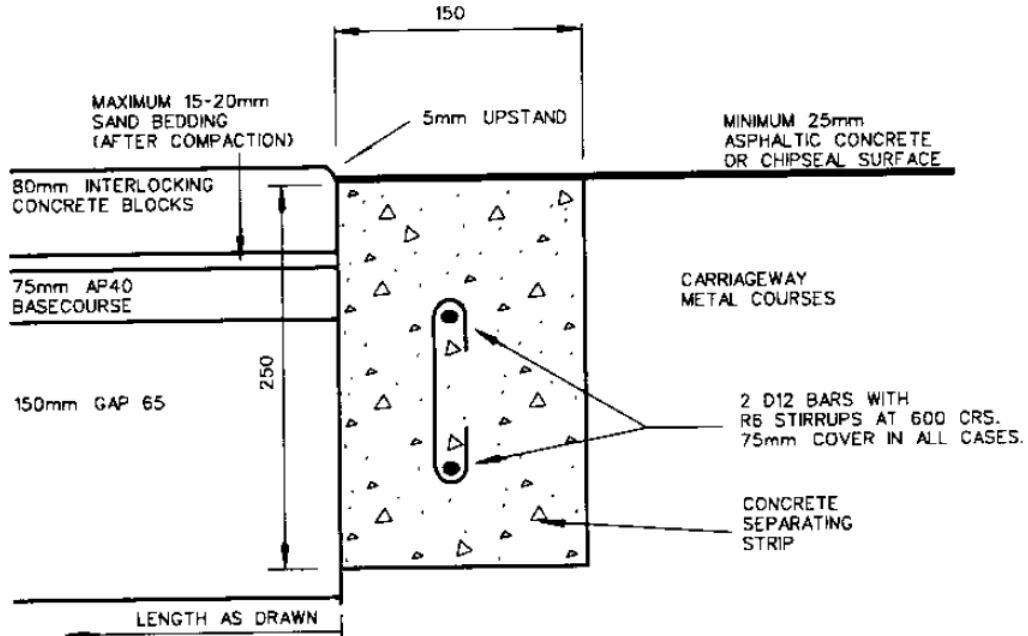

**CARRIAGEWAY THRESHOLDS
LONGITUDINAL SECTION**

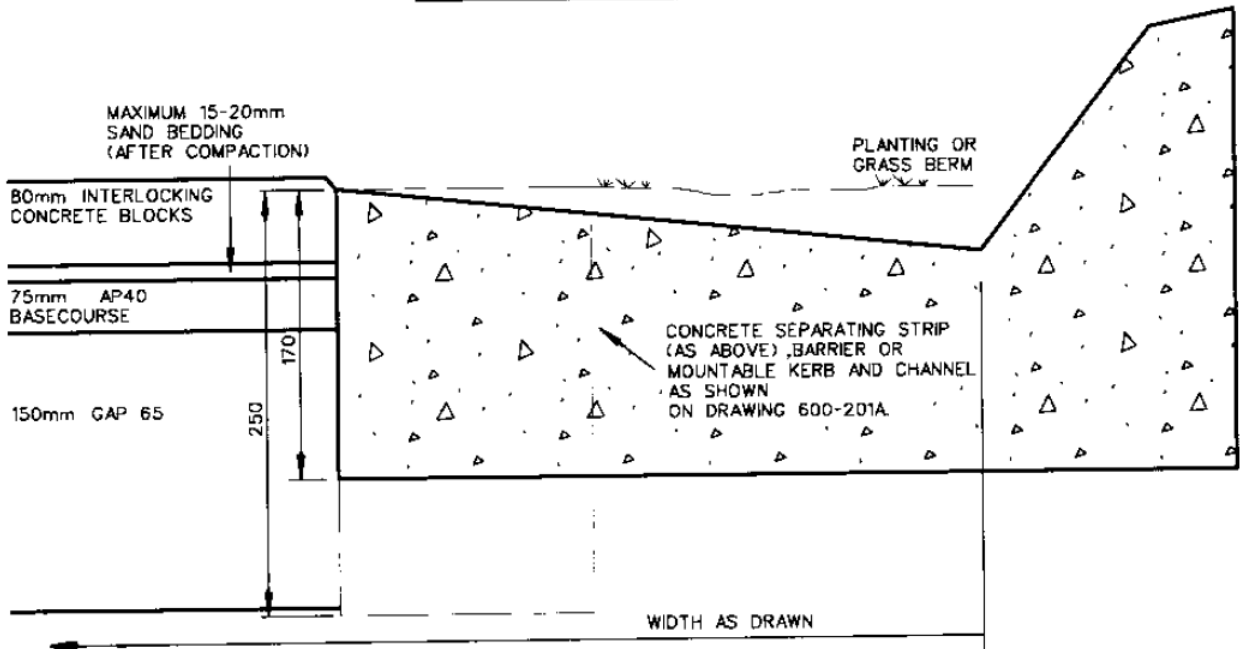

**INTERLOCKING CONC BLOCKS ADJACENT
TO KERBING, PLANTING OR GRASS BERM**

CAD REF : \$FILE\$

| | |
|-------|-----|
| SCALE | NTS |
|-------|-----|



| | |
|-------------|--|
| SHEET TITLE | INTERLOCKING CONCRETE BLOCK PAVEMENT EDGE TREATMENTS |
|-------------|--|

| | |
|------------|---------------|
| PLAN No. | 3000 SHEET 26 |
| Date Stamp | 01/08/2003 |
| ISSUE | A |
| Sheet No. | 1 of 1 |