


SECTION
N.T.S.

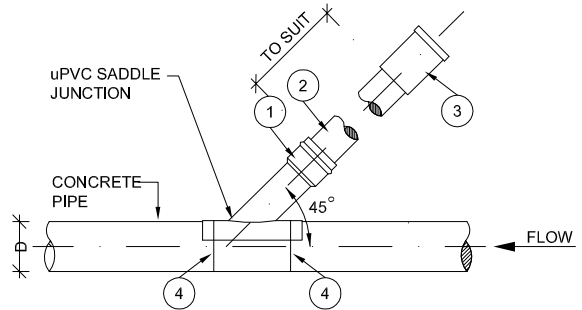

ELEVATION
N.T.S.

SERVICE CONNECTION FITTINGS SCHEDULE			
FITTING	DIA (mm)	DESCRIPTION	QTY.
①	D x 110 (D x 160)	uPVC SADDLE JUNCTION, SN16 COMPLYING WITH AS/NZS 1260, BRANCH PIPE TO HAVE RUBBER Z-RING JOINT SUITABLE FOR CONNECTION WITH 110 OD uPVC PIPE, BRANCH TO BE HEAT WELDED TO SADDLE USING RIGID "MARLEY D884" RODS TO FORM A WATER TIGHT JOINT. JOINT IS TO BE REINFORCED WITH ONE LAYER OF FIBREGLASS.	1
②	110 (160)	uPVC PIPE CUT TO SUIT (300mm LONG WHERE NO RISER REQUIRED)	1
③	110 I.D. (160 I.D.)	uPVC SEHC SCREW CAP FITTING (INCLUDING CAP)	1
④	13mm	GRADE 316 STAINLESS STEEL BANDIT BANDING STRAP WITH BUCKLES.	2

NOTES:

- 1) The hume bond shall be carefully finished off flush inside the barrel of the pipe so that no protrusion of epoxy occurs. The barrel should be smooth and neat.
- 2) Solvent cement and cleaner primer shall be of an approved make eg. Novakey or similar.
- 3) Diameter in brackets represents fitting size for 150mm diameter connections.



STANDARD DETAIL:

**STORMWATER SERVICE
CONNECTION DETAILS
SADDLE JUNCTION**

DATE: June 2010
NOT TO SCALE

TCDC NO:

SHEET NO:

REV:

6000

4