


On-site Stormwater Disposal Retention Well

Appendix H16D

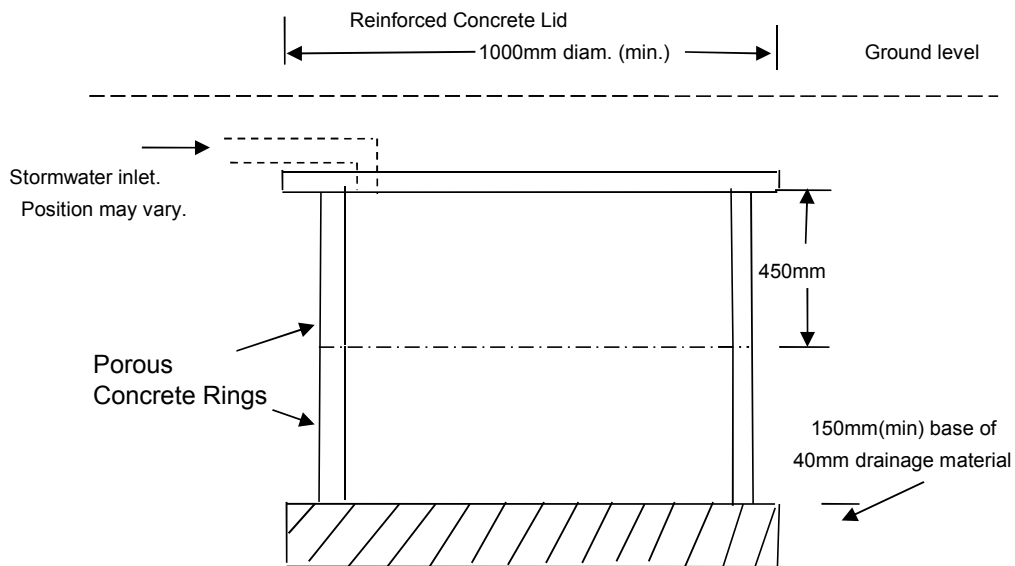

**Section: Typical on-site stormwater retention well.
Showing two standard 900mm diam. porous concrete rings.**

Not to scale.

Notes:

1. This system may only be utilized in sand sub-soils
2. The base must be placed above the winter watertable.
3. The position of the stormwater inlet may vary.
4. A system (Leaf catcher) should be attached to the inlet to prevent debris from entering the well.
5. The landowner/consent holder must be advised that the system requires regular maintenance.