




Bollards

-1200mm x 200mm H4 roundwood UniLog bollards Supplied by TTT Products.

-Bevelled top with routed collar

-Install-1600mm centres (1400mm gap between bollards)
600mm in the ground, 600mm above ground level
Disturbed soil around bollard to be rammed

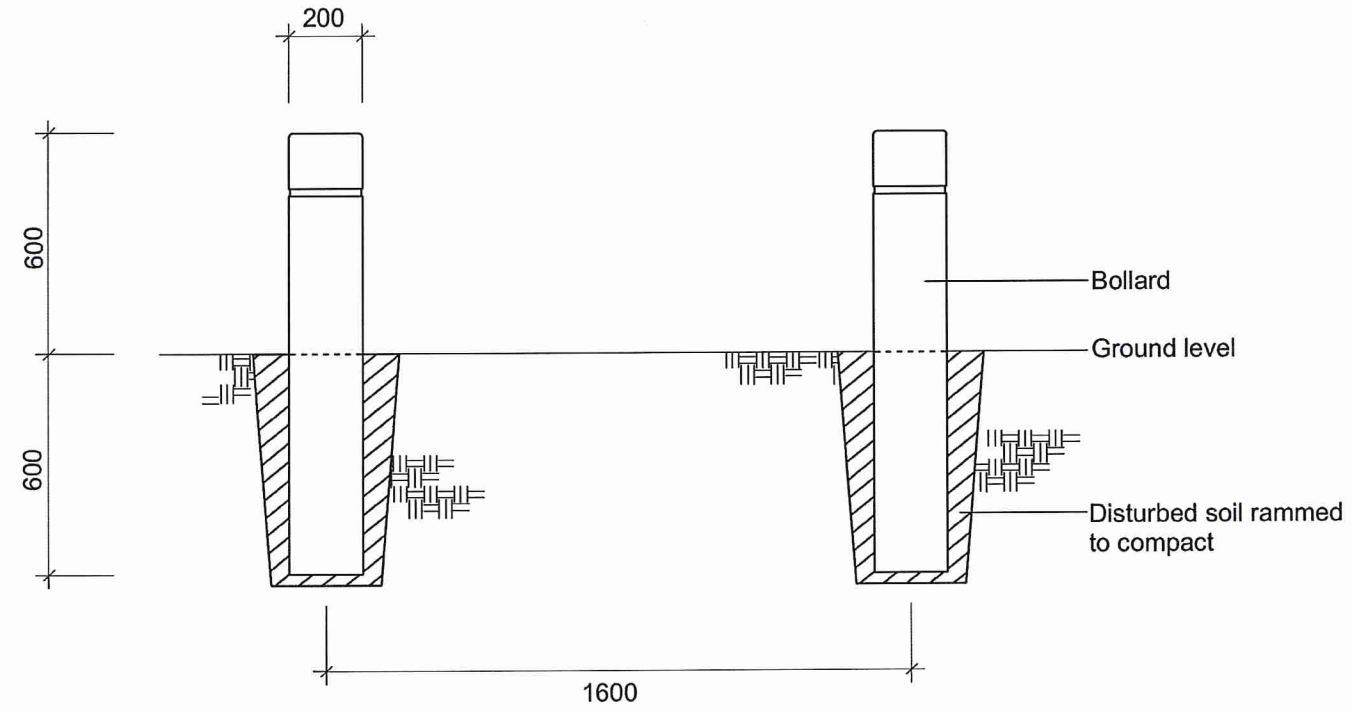

Scale- 1:20 at A4
All measurements in mm

